


A7670E

SIMCom LTE Cat 1 Module

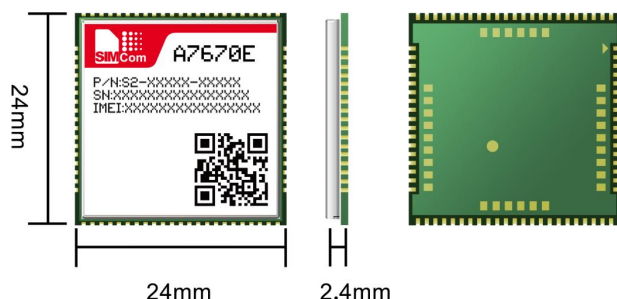


Product Description

A7670E is the LTE Cat 1 module which supports wireless communication modes of LTE-FDD based on the latest ASR1602 platform. It supports maximum 10Mbps downlink rate and 5Mbps uplink rate.

A7670E adopts LCC+LGA form factor and is compatible with SIM7000/SIM7070 series (NB/Cat M modules), and SIM-800A/SIM800F series (2G modules), which enables smooth migration from 2G/NB/Cat M products to LTE Cat 1 products, and greatly facilitates more compatible product design for the customer needs.

A7670E supports both multiple built-in network protocols and the drivers for main operation systems (Windows, Linux and Android). The software functions, AT commands are compatible with the SIM800 series modules. It integrates abundant industrial standard interfaces with powerful expansibility, such as UART, USB, I2C and GPIO, which makes it perfectly suitable for main IOT applications such as telematics, POS, surveillance devices, industrial routers, and remote diagnostics etc.

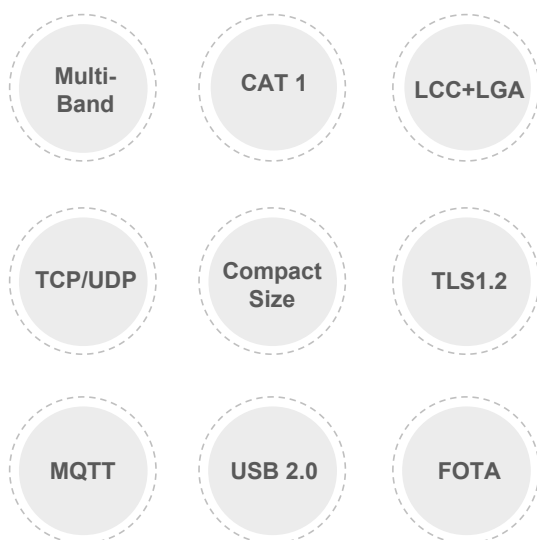

Key Benefits

- ◆ Compact size with abundant interfaces
- ◆ Abundant software functions
- ◆ Form factor is compatible with the SIM7000/SIM7070 series

General Features

Frequency Bands	LTE-FDD B1/B3/B5/B7/B8/B20/B28*
Supply Voltage	3.4V ~ 4.2V, Typ: 3.8V
Control Via AT Commands	
Operation temperature	-40°C ~ +85°C
Dimensions	24*24*2.4mm
Weight	2.8±0.1g

Data Transfer

LTE Cat 1	Uplink up to 5Mbps
	Downlink up to 10Mbps

Other Features

USB Driver for Microsoft Windows 7/8/10
USB Driver for Linux /Android
RIL supporting for Android 7.0/8.0/9.0/10.0
Firmware update via USB/FOTA
TCP/UDP/IPV4/IPV6/FTP/FTPS/MQTT/MQTTS/HTTP/HTT PS/HTP/NTP
TLS1.2
RNDIS/PPP/ECM
LBS
Multi-GNSS receiver: GPS/GLONASS/BeiDou

Interfaces

USB2.0
UART
(U)SIM card(1.8V/3V)
ADC
I2C
GPIO
SPI
Antenna: Primary/GNSS*

Certifications

CE/RoHS/REACH

Note

*: optional
#: on going